

NEW IP RATED LUMINAIRES

THE PRECILINE™ FAMILY

SUITABLE ALSO FOR DUSTY, WET AND BAD WEATHER





CONTENT

THE PRECILINE FAMILY

THE PRECILINEAR™
AMBIENT SURFACE
MOUNTED



THE PRECILINEAR™ WALL MOUNTED



THE PRECILINEAR™ SURFACE MOUNTED



THE PRECISQUARE™ SURFACE MOUNTED



5 THE PRECILINEAR™ SUSPENDED




THE PRECISQUARE™ SUSPENDED







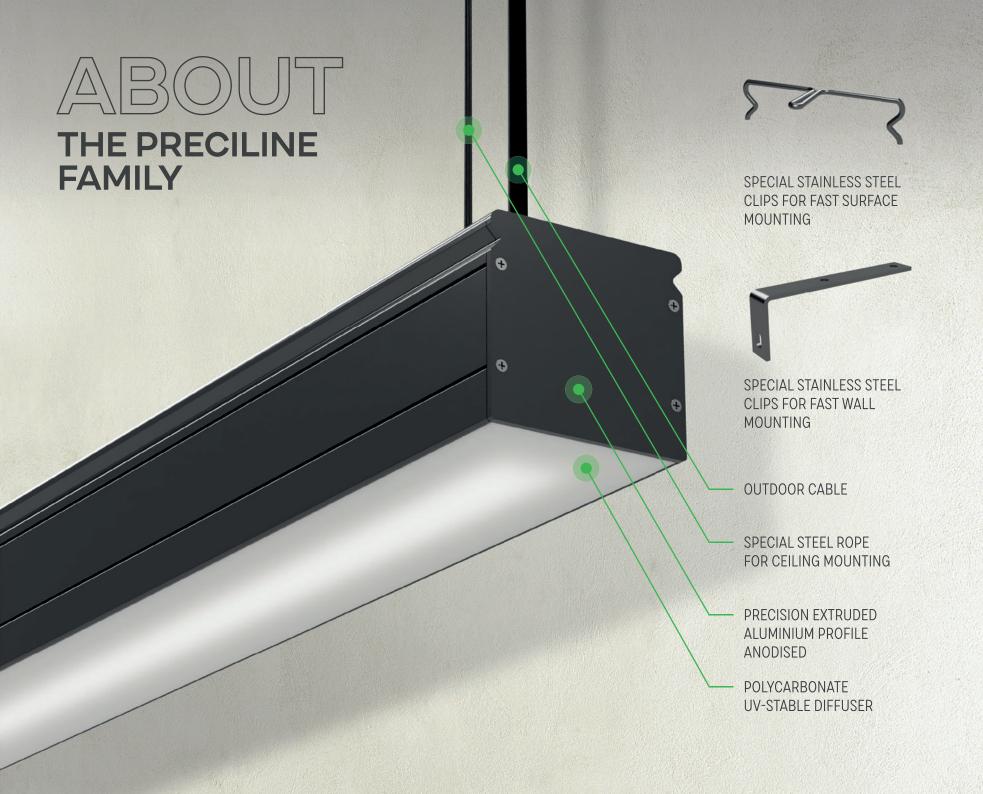

THE PRECILINE™ FAMILY

THE PRECILINEAR™ AMBIENT SURFACE MOUNTED

Linear fixture designed for ambient applications, suitable for facade and architectural illumination.

Continuous, homogeneous or directional lighting effect.

No multiple shadows, energy-efficient LEDs with very good colour rendering.

INPUT VOLTAGE	24V DC
POWER	5W/M, 10W/M, 15W/M
LED VARIANT	2700К - 6500К
DIMENSIONS	L= 520, 1020, 1520 (UP TO 3000) X 59,5 X 57 MM
MATERIALS	ALUMINIUM PROFILE, UV STABLE DIFFUSER, SS MOUNTING CLIPS
CONTROL	ON/OFF, DIMMABLE BY EXTERNAL DRIVER














INPUT VOLTAGE	230V 50HZ
POWER	MAX. 45 W
LED VARIANT	3000К, 4000К, 6500К
DIMENSIONS	L= 850, 1130, 1411 OR 1695 X 59,5 X 57 MM
MATERIALS	ALUMINIUM PROFILE, TEMPERED GLASS COVER, SPECIAL OUTDOOR CABLE
CONTROL	ON/OFF, DALI



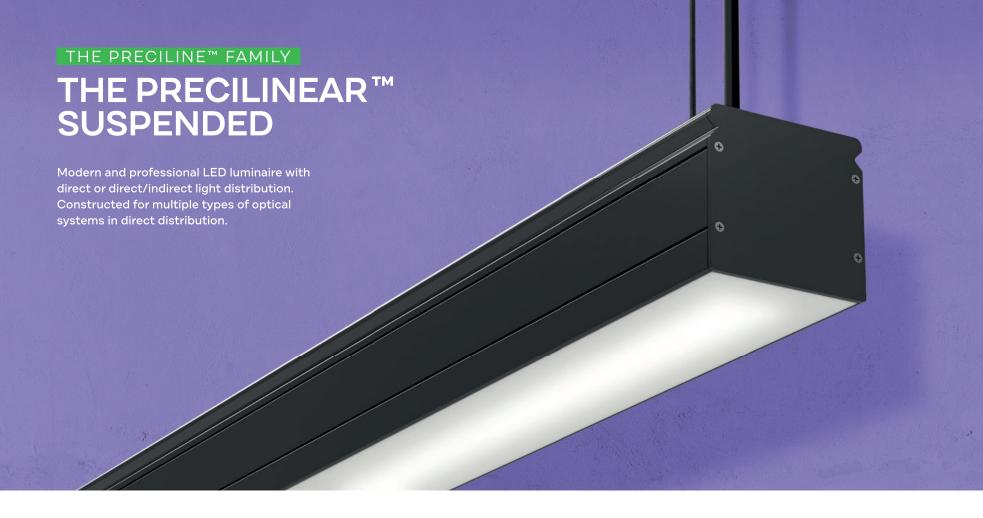

INPUT VOLTAGE	230V 50HZ
POWER	MAX. 45 W
LED VARIANT	3000К, 4000К, 6500К
DIMENSIONS	L= 850, 1130, 1411 OR 1695 X 59,5 X 57 MM
MATERIALS	ALUMINIUM PROFILE, TEMPERED GLASS COVER, SPECIAL OUTDOOR CABLE
CONTROL	ON/OFF, DALI

















INPUT VOLTAGE	230V 50HZ
POWER	MAX. 45 W
LED VARIANT	3000К, 4000К, 6500К
DIMENSIONS	L= 850, 1130, 1411 OR 1695 X 59,5 X 57 MM
MATERIALS	ALUMINIUM PROFILE, TEMPERED GLASS COVER, SPECIAL OUTDOOR CABLE
CONTROL	ON/OFF, DALI





INPUT VOLTAGE	230V 50HZ
POWER	MAX. 81 W
LED VARIANT	3000K, 4000K, 6500K
DIMENSIONS	900X900 MM
MATERIALS	EXTRUDED ALUMINIUM PROFILE, PC COVER
CONTROL	ON/OFF, DALI













INPUT VOLTAGE	230V 50HZ
POWER	MAX. 81 W
LED VARIANT	3000К, 4000К, 6500К
DIMENSIONS	900X900 MM
MATERIALS	EXTRUDED ALUMINIUM PROFILE, PC COVER
CONTROL	ON/OFF, DALI







CLEVER DESIGN NEVER AGES...

WWW.PRECILUM.COM

