

# TRILOBIT ECO

ON/OFF or DALI

Length = 290/570/850/1130



## INSTRUCTIONS MANUAL

**PRECILUM<sup>®</sup>**  
SPECIAL LED LIGHTING SOLUTIONS

# TABLE OF CONTENTS

1. INTRODUCTION	2
2. SAFETY AND OPERATION	6
3. INSTALLATION	7
4. CONNECTION DIAGRAMS	15
5. CARE AND MAINTENANCE	16
6. TECHNICAL SPECIFICATION	17
7. WARRANTY STATEMENT	18

LED



Electrostatic Sensitive Device  
(ESD)

FOR YOUR OWN SAFETY PLEASE READ THIS INSTRUCTION  
MANUAL CAREFULLY BEFORE BEGINNING SETUP AND  
INSTALLATION.

# 1. INTRODUCTION

---

## 1.1 About the product


TRILOBIT ECO WHITE - LED surface-mount light line for static or dynamic surface illumination, for indoor and mainly for outdoor use. The linear fixture Trilobit White utilises the latest TRIDONIC LED technology. The refined thermal management system incorporates a sleek and robust heatsink directly into the fixture to ensure maximum heat transfer and long LED life. This linear module bringing the flexibility to outdoor application. It is ideally suited to use in facade illumination, and IP66 ensures safe operation in even the most demanding areas. Available lengths 290, 570, 850, 1130 mm as standard.

It made using highest quality materials and construction methods, bringing the flexibility to outdoor application. This powerful lighting fixture is ideally suited to use in landscape and building illumination and IP66 ensures safe operation in even the most demanding areas.


# 1. INTRODUCTION

## 1.2 Dimensions of fixture


Lenght = 290 mm

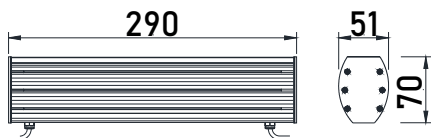


Lenght = 570 mm

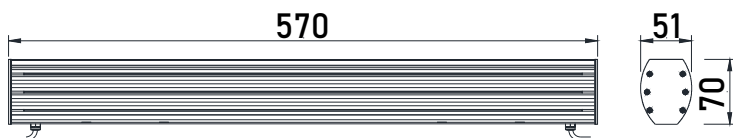

Lenght = 850 mm

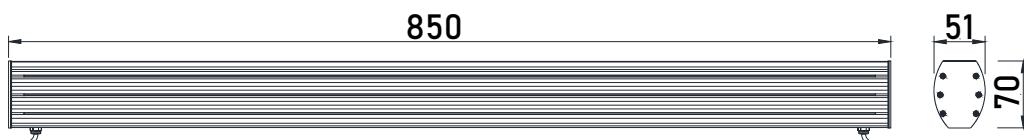

Lenght = 1130 mm

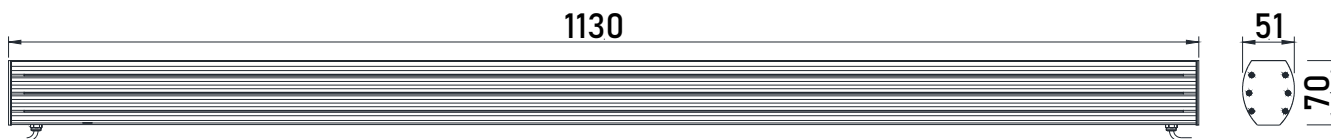


# 1. INTRODUCTION


## 1.3 Dimensions of hanging bracket

### 1.3.1 Fixed bracket


Bracket 25 mm:



Bracket 40 mm:




Wall mounted part:

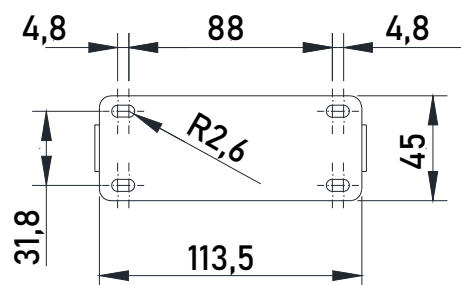


### 1.3.2 Adjustable bracket

Bracket 200 - 300 mm:

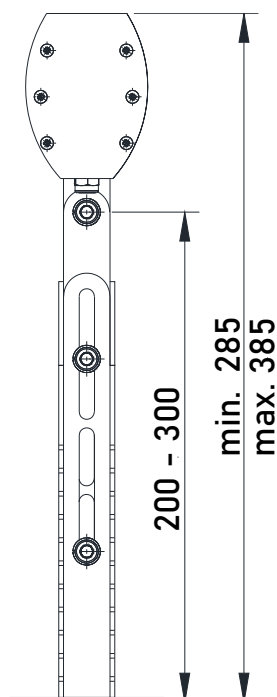


Wall mounted part:

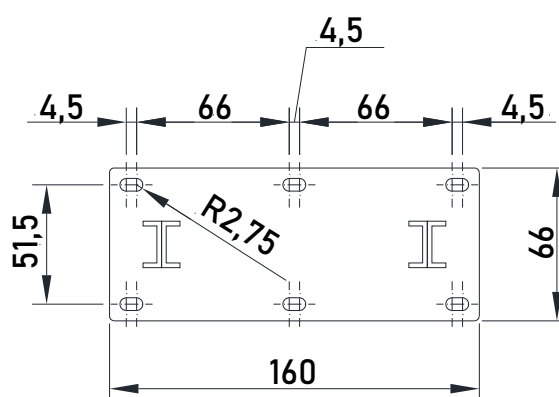


# 1. INTRODUCTION

## 1.3.3 Fixation methods


Bracket 25 mm:

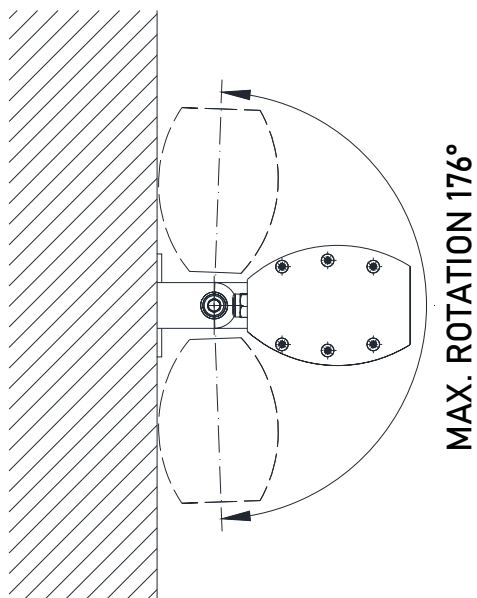

Bracket 40 mm:

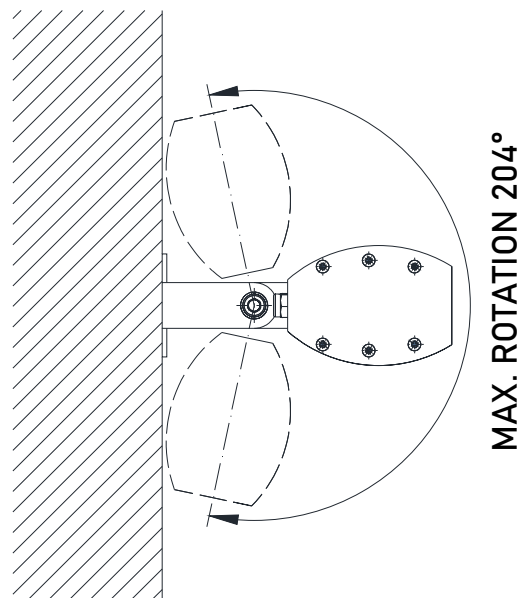

Bracket 200 - 300 mm:

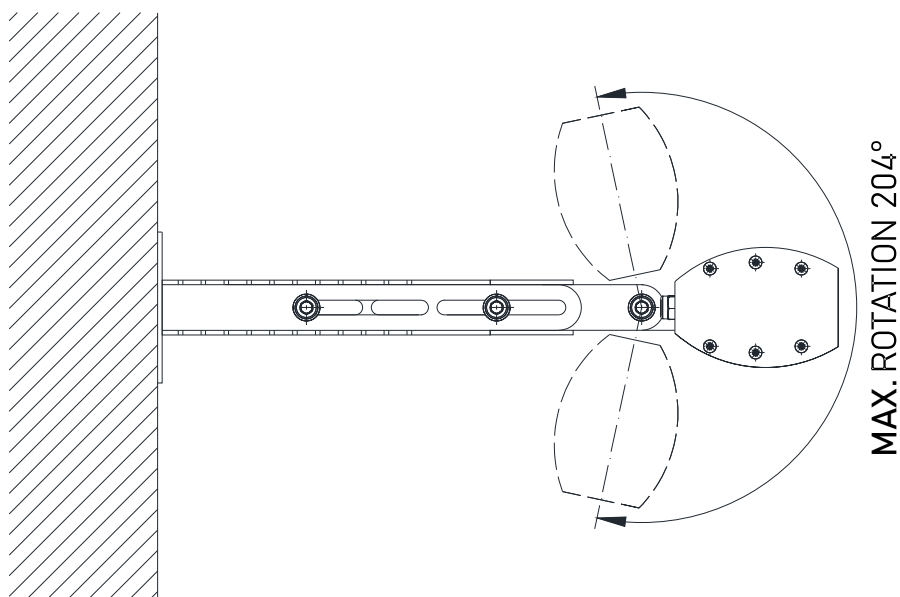

## 2. SAFETY AND OPERATION

**CAUTION - DANGEROUS VOLTAGE CONSTITUTING A RISK OF ELECTRIC SHOCK IS PRESENT WITHIN THIS UNIT!**

**CAUTION - THE POWER SUPPLY MUST BE UNPLUG FROM THE MAINS POWER BEFORE CONNECTING ANY CABLES TO AVOID DAMAGING THE PRODUCT!**


**CAUTION – FOR YOUR OWN SAFETY AVOID LOOKING DIRECTLY INTO THE LED LIGHT SOURCE!**

**ANY PERSONS WHO INSTALLING THIS PRODUCT MUST BE QUALIFIED FOR THE HANDLING OF ELECTRICAL EQUIPMENT AND INSTALLATION MUST BE PERFORMED WITH LOCAL STANDARTS AND REGULATIONS!**


- Consider the respective national norms during the installation!
- Do not install the fixture near high inflammable liquids or materials.
- Do not looking directly into the LED light beam at close range.
- Turn off the power prior to light fixture installation!
- The light fixture may be installed only by a qualified person!
- The light fixture must be wired according to respective electrical standards.
- The manufacturer shall not be liable for any modifications of the product of incorrect installation of the product.
- Never install the luminaire on rain, fog or high humidity.

## 3. INSTALLATION

### 3.1 Installation of fixture

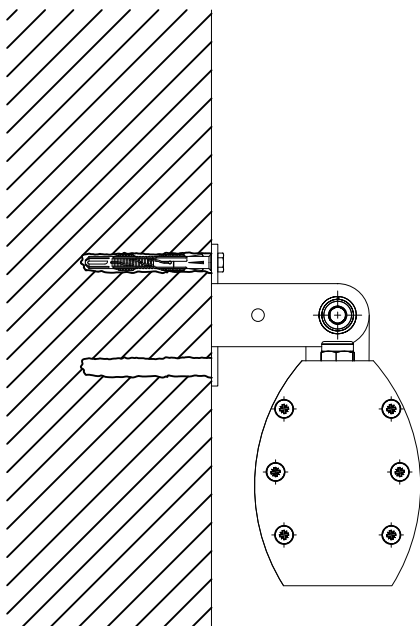

**Fig. 1**

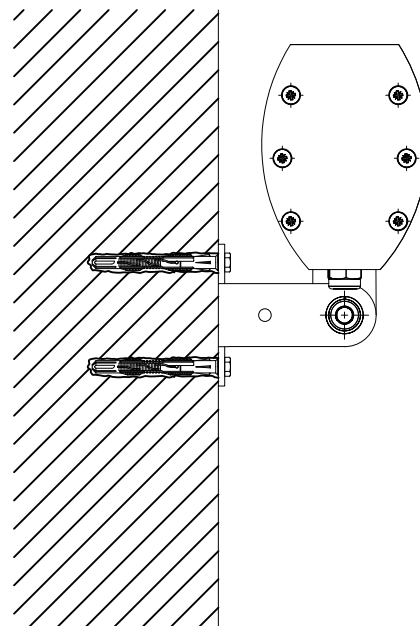


**Fig. 2**


- Drill the holes into the wall according to the holes in the hanging bracket.
- Mount the hanging bracket according Fig.1. Use dowels and screws. (Fig. 1)
- First screw the top of the bracket, then turn the luminaire and fix the other side. (Fig. 2)
- Make sure it is mounted firmly and precisely.



### 3. INSTALLATION

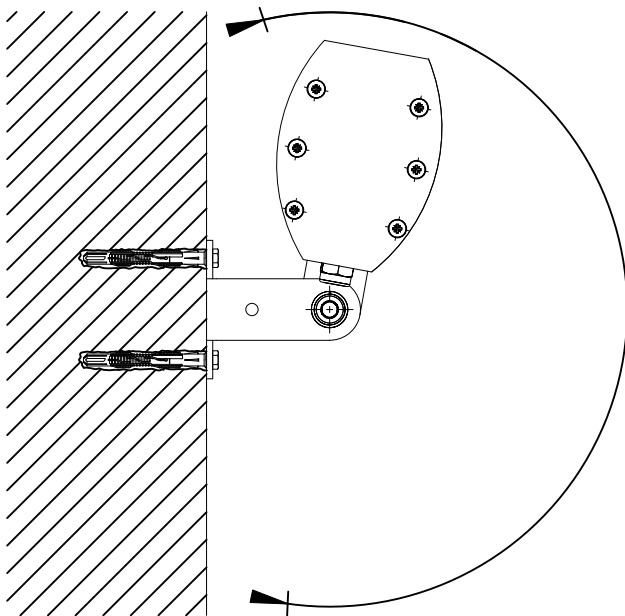

**Fig. 3**

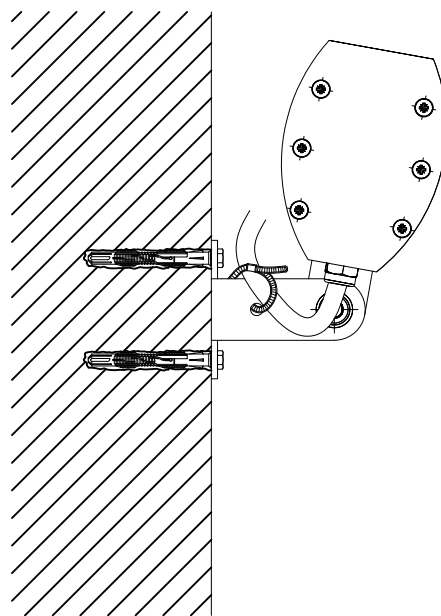


**Fig. 4**

- Adjust required angle of the luminaire. (Fig. 3)
- Stabilize the angle by tightening the screws. (Fig. 3)
- Fasten the cable coming out from the luminaire to the bracket using cable-ties in such a way that it does not touch the wall. By this way water will not be leaking on the wall. (Fig. 4)

## 3. INSTALLATION

### 3.2 Connection

#### 3.2.1 Wiring - ON/OFF option - cable output in the middle

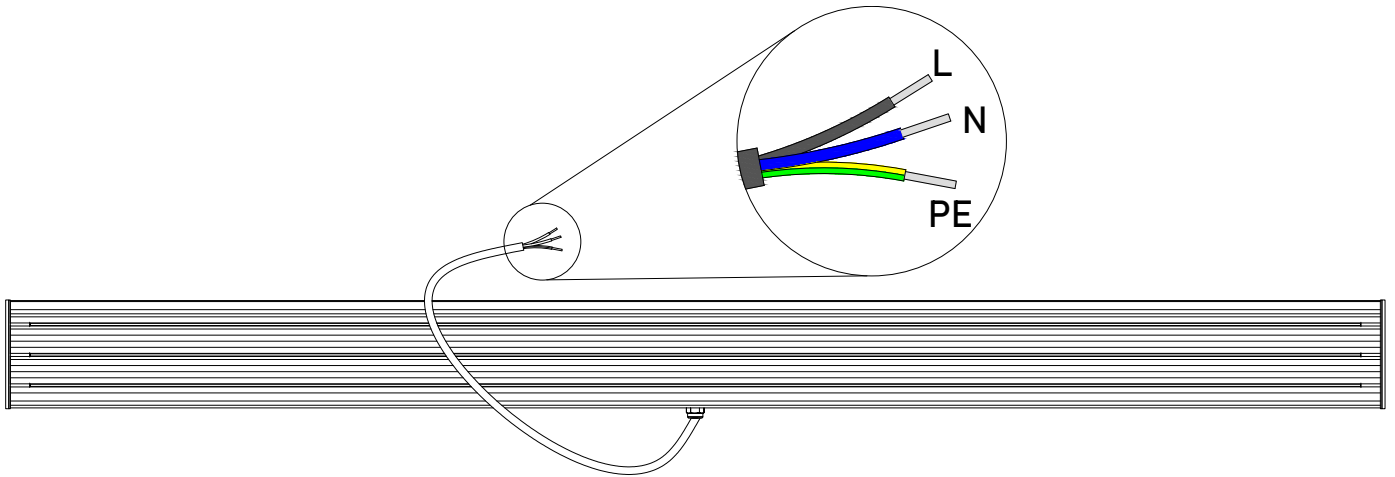

Wire L (Live) – black


Wire N (Neutral) – blue

Wire PE (Earth) – yellow/green

## 3. INSTALLATION

### 3.2 Connection

#### 3.2.2 Wiring - DALI option - cable output in the middle

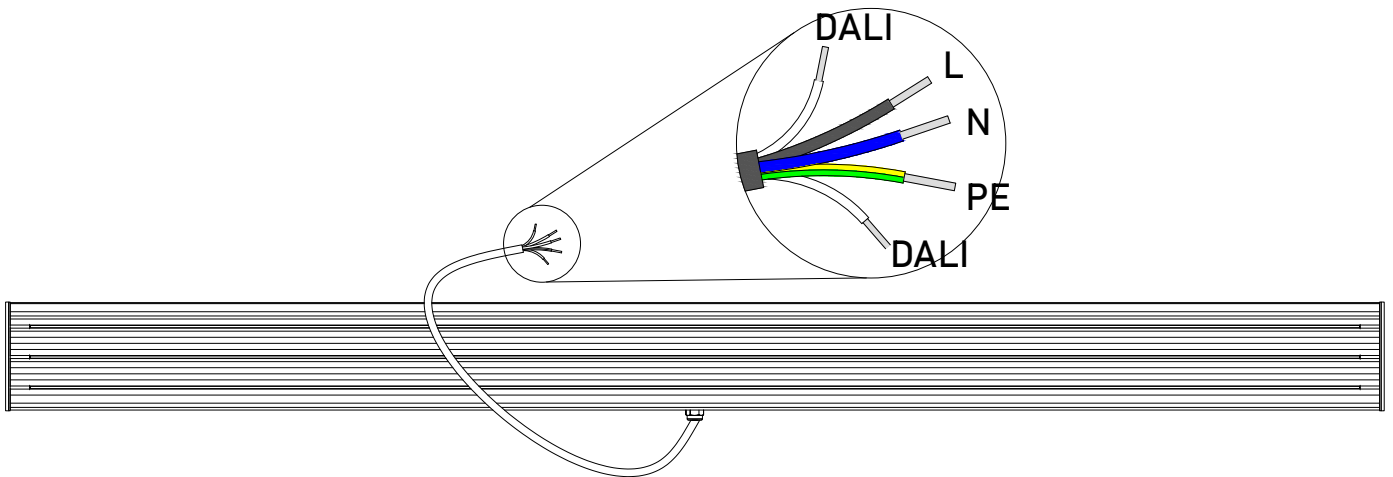

Wire L (Live) – black

Wire N (Neutral) – blue

Wire PE (Earth) – yellow/green


Wire DA1 (Dali) – white

Wire DA2 (Dali) – white

## 3. INSTALLATION

### 3.2 Connection

#### 3.2.3 Wiring - ON/OFF option - cable output IN/OUT

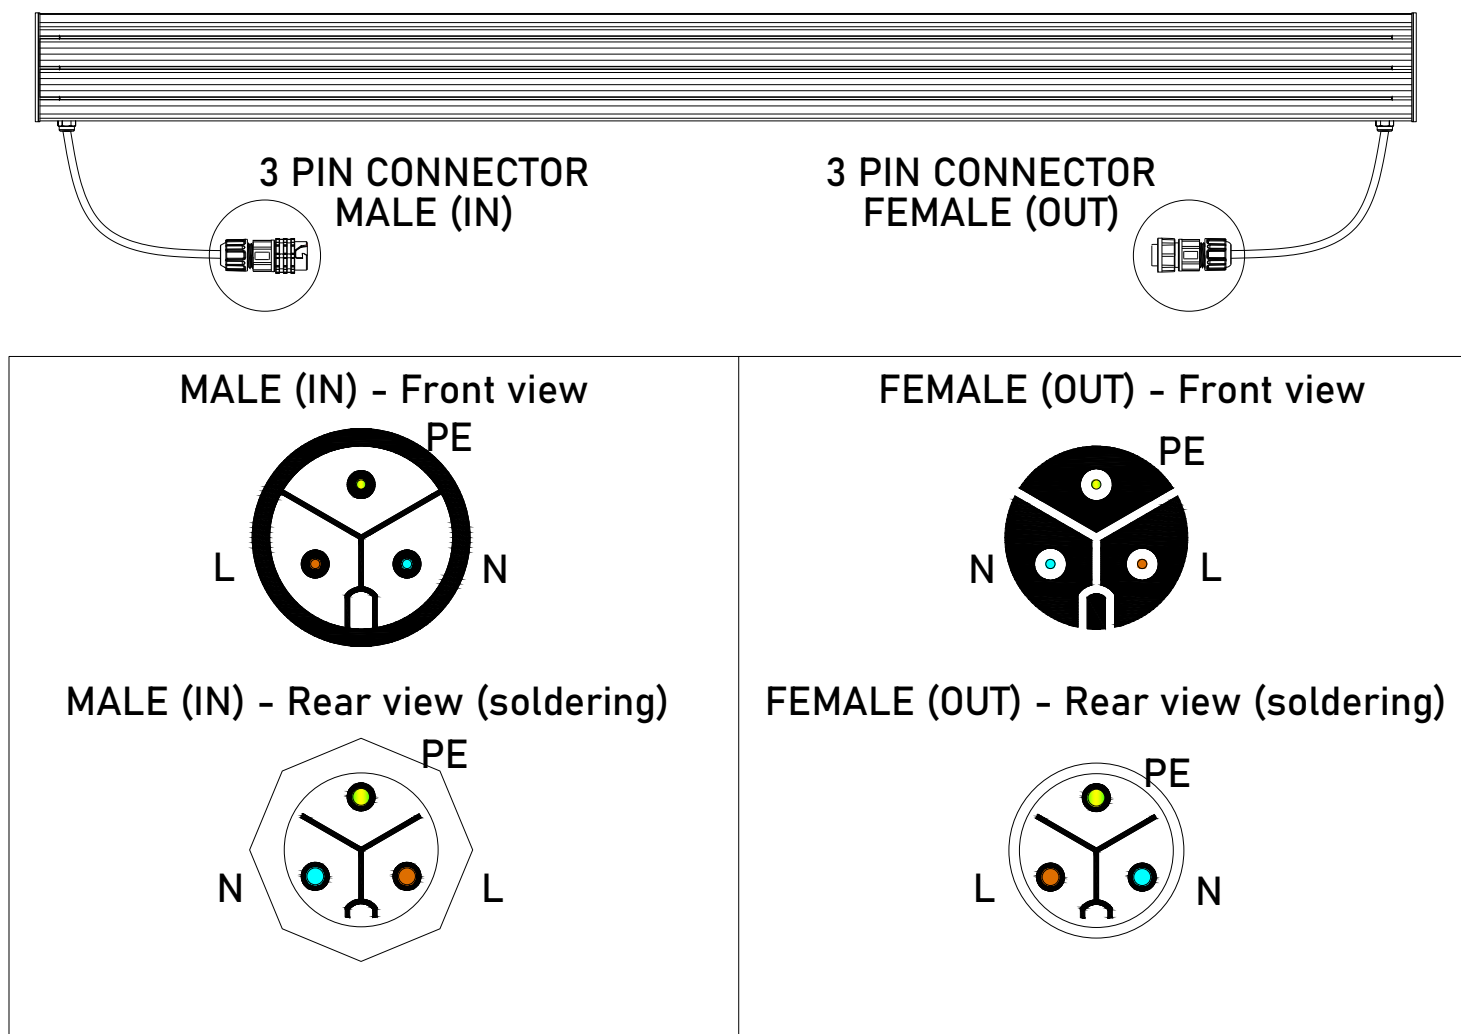

- Wire L (Live) – black
- Wire N (Neutral) – blue
- Wire PE (Earth) – yellow/green


## 3. INSTALLATION

### 3.2 Connection


#### 3.2.4 Wiring - DALI option - cable output IN/OUT




MALE (IN) - Front view

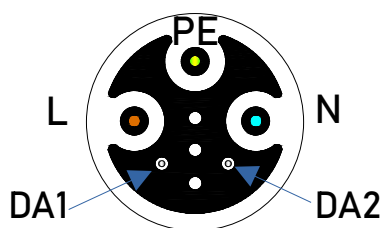


MALE (IN) - Rear view (soldering)

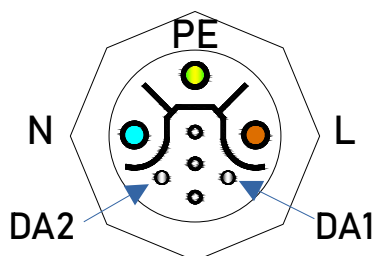

FEMALE (OUT) - Front view

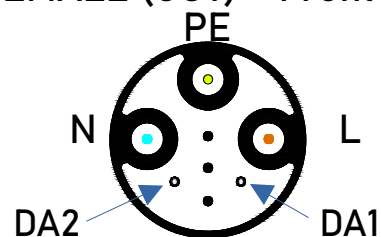

FEMALE (OUT) - Rear view (soldering)

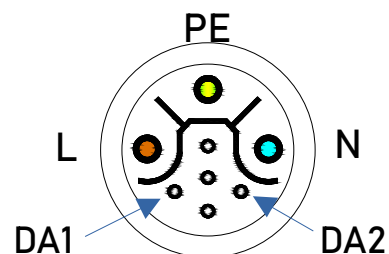

- Wire L (Live) – black
- Wire N (Neutral) – blue
- Wire PE (Earth) – yellow/green
- Wire DA1 (Dali) – white
- Wire DA2 (Dali) – white

## 3. INSTALLATION

### 3.3 IP connection - cable output in the middle

PRECILUM requirement:

Use a SCAME IP box or similar (not included).



Must be made a waterproof connection of at least IP68. We strongly recommend to use special two components silicone GEL for sealing junction boxes containing electrical connections. **If the IP rating of the connection is not observed, the complaint will not be accepted!**

For example:

<https://www.etelec.com/prodotto/mpgel/>

Video tutorial:

<https://www.youtube.com/watch?v=tj6ksKdzuE0>



## 3. INSTALLATION

### 3.3 IP connection - cable output in the middle

PRECILUM recommendation:

Use a TECHNO® IP circular junction connector (TeeTube®) or TECHNO® IP junction box (TeeBox®). Not included!



TeeTube®




TeeBox®

- 3 poles (ON/OFF) TeeTube® (THR.390.S3T):  
<https://www.techno.it/en/products/all/thr-390-s3t/>
- 5 poles (DALI) TeeTube® (THB.402.C1F.R):  
<https://www.techno.it/en/products/all/thb-402-c1f-r/>
- 3 poles (ON/OFF) TeeBox® (THR.200.S3M):  
<https://www.techno.it/en/products/all/thr-200-s3m/>
- 5 poles (DALI) TeeBox® (THB.200.E5E):  
<https://www.techno.it/en/products/all/thb-200-e5e/>


## 4. CONNECTION DIAGRAMS

### 4.1 ON/OFF or DALI option

#### 4.1.1 Cable output in the middle

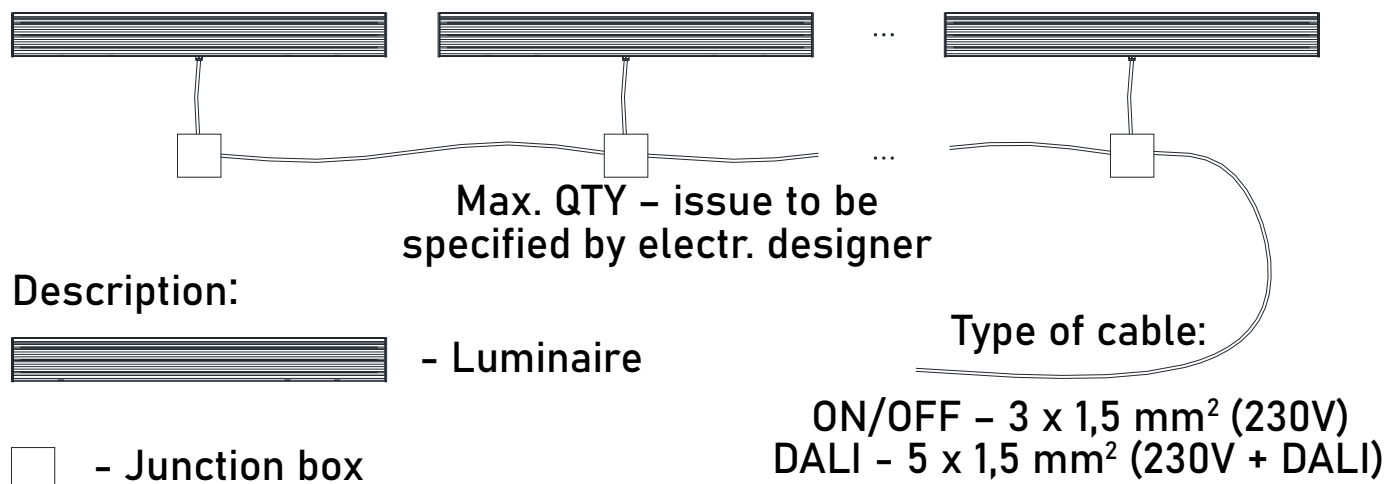

#### 4.1.2 Cable output IN/OUT

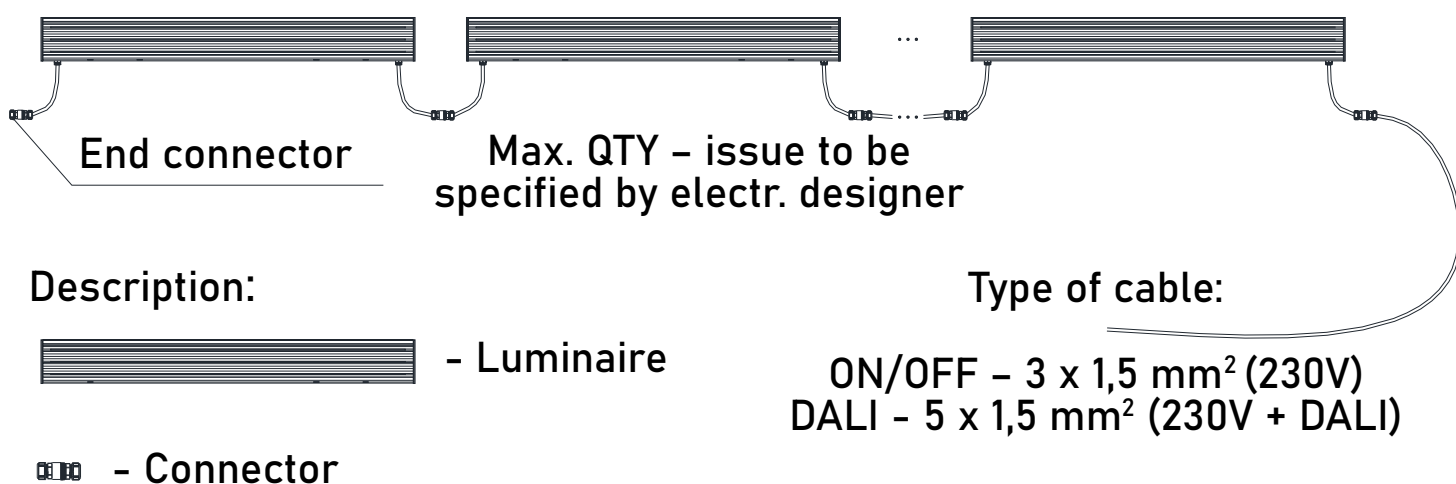



## 5. CARE AND MAINTENANCE

**PRECILUM™ PRODUCTS ARE OF SUPERIOR DESIGN AND QUALITY AND SHOULD BE TREATED WITH CARE. THE RECOMMENDATIONS BELOW WILL HELP FULFILL GAIN GOOD USE AND LONGEVITY FROM THE PRODUCTS.**

Clean the front transparent cover at least every 6 months. Use a moist, lint-free cloth. Never use alcohol or solvents.

A scheduled maintenance programme must be carried out on the installation and the fittings regardless of their IP rating or application – these must include the following operations:

- Clean the fittings from dirt that may be deposited in the heads of the screws by following the installation instructions attached to each fitting.
- Check that the screws are not loose on the various components of the luminaire (glass frame, cable entry , ...).
- Check each cable gland, and cable for damage and that the cable gland has not come loose.
- For each Isolation Class 1 fitting check that the earth cable has not come loose. The clip must not show signs of oxidation,damage or become loose.
- For class 2 fittings check any eventual plastic / isolating covering in order to verify any damage.
- Check that all the seals are in good condition and that they are not damaged or split.

The internal components such as the ballasts, transformers, washers and screws must not show clear signs of oxidation or rust.

Clear traces of rust and oxidation will indicate the presence of water inside the luminaire.

In case of damage the components must be replaced by original components and spare parts before using the fitting.

We also recommend to check the fitting at least once a year or within the prescribed maintenance schedule period depending on the type of installation.

## 6. TECHNICAL SPECIFICATION

Mounting:	See 1.3 Dimensions of hanging bracket
Optical system:	Narrow, Medium, Wide, Flood
LED device:	TRIDONIC PCB board
LED colour:	2700K, 3000K, 3500K, 4000K, 5000K, 5700K
Lumen output:	See datasheet
Input voltage:	230V 50Hz AC
Driver type:	Electronic control gear TRIDONIC
Max. power consumption:	TRILOBIT ECO 290 8W (current 300mA)  TRILOBIT ECO 570 15W (current 300mA)  TRILOBIT ECO 850 23W (current 300mA)  TRILOBIT ECO 1130 31W (current 300mA)
Service lifetime:	120 000 hrs./L70 @25°C
Operation ambient temp:	-20°C/+40°C
Materials:	Housing: extruded aluminium Cover: clear tempered glass
Dimensions:	See dimensional drawing
Environment:	IP66
Weight:	TRILOBIT ECO 290: 0,8 kg TRILOBIT ECO 570: 1,9 kg TRILOBIT ECO 850: 3,0 kg TRILOBIT ECO 1130: 3,9 kg
Accessories:	See website

## 7. WARRANTY STATEMENT

---

Precillum provides a product warranty for a period of five (5) years from date of purchase.

Please refer [www.precillum.com](http://www.precillum.com) for all warranty terms and conditions.





**Please check for latest updates and changes on the Precilum website.**

**©2021 PRECILUM s.r.o ALL RIGHT RESERVED. All specifications subject to change without notice.**

**WWW.PRECILUM.COM**