

BOLLARD STAINLESS 25828 (ON/OFF, DALI)




The PRECILUM GARDEN range brings the bollard BOLLARD STAINLESS to the outdoor world of garden lighting. Bringing the flexibility to outdoor application, this lighting fixture is ideally suited to use in the gardens and parks. Manufactured from stainless steel for a long life.



PRODUCT SPECIFICATIONS

- INPUT VOLTAGE: 230V 50 Hz
- EFFICIENCY: > 87%
- POWER CONSUMPTION: 9 × 1W...11W (up to 480 lm)
9 × 2W...20W (up to 1079 lm)
- LIFETIME: > 70 000 hours
- THERMAL PROTECTION: yes
- LED DEVICE: CITIZEN or OSRAM COB
- LED VARIANTS: 3000K, 4000K, 5000K and other according requirement
- WEIGHT: 8,86 kg
- OPERATING TEMPERATURE: range -20 °C to +40°C
- ENVIRONMENT: for OUTDOOR use, IP54
- HOUSING COLOR: stainless steel colour
- MATERIALS: housing-stainless steel, PC cover
- CONTROL: ON / OFF or DALI

DIMENSIONAL DRAWINGS

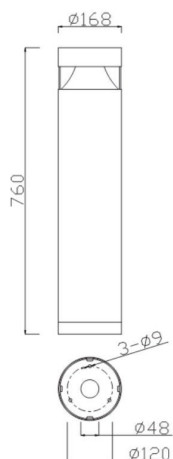


INSTALATION PICTURE



BOLLARD STAINLESS 25828 (ON/OFF, DALI)

PHOTOMETRICS

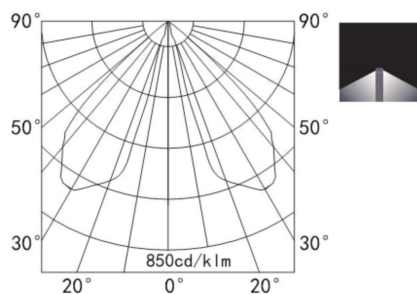

ACCESSORIES

- See WEB site

CONNECTION

- SERIAL CONNECTION MUST BE DONE BY CERTIFIED ELECTRICIAN