

VECTOR SQUARE 640 × 640 (ON/OFF, DALI)




Suspended square-shaped LED luminaire with direct light distribution, represents a simple and flexible tool for lighting of large areas, especially commercial or public spaces. Available in three basic dimensional executions, different dimensions available on request. Opal diffuser or prismatic diffuser with high light transmission, nice diffuse light characteristics. Luminaire housing made of extruded aluminium profiles, joined together by corner joints. Eloxed high quality finish. Luminaire is designed for suspended or surface mounted installation. Suspended versions standardly equipped with adjustable mechanism for changing of the suspension height.



PRODUCT SPECIFICATIONS

- INPUT VOLTAGE: 230V 50Hz
- EFFICIENCY: > 92 %
- POWER CONSUMPTION: 59W (up to 5900 lm)
- LIFETIME: > 100 000 hours
- THERMAL PROTECTION: yes
- LED DEVICE: OSRAM LED TECHNOLOGY
- LED VARIANTS: 3000K, 4000K, 6500K
- WEIGHT: 6 kg
- OPERATING TEMPERATURE: range -20°C to +40°C
- HOUSING COLOR: elox grey, white, black and other according requirement
- MATERIALS: extruded Aluminium, cover - opal diffuser or prismatic diffuser
- CONTROL : ON/OFF or DALI

DIMENSIONAL DRAWINGS

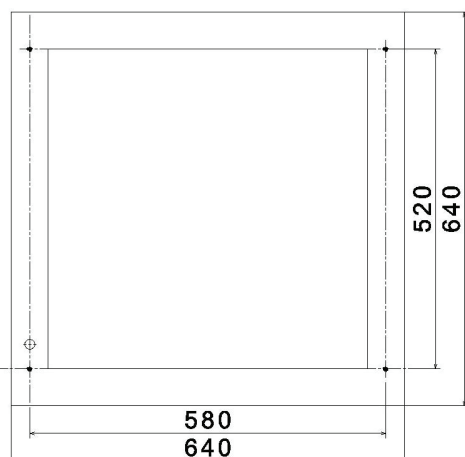

VECTOR SQUARE 640 × 640 (ON/OFF, DALI)

PHOTOMETRICS

- SEE AND DOWNLOAD .LDT FROM WEB SITE

ACCESSORIES

- SEE WEB SITE
-

CONNECTION

- SERIAL CONNECTION MUST BE DONE BY CERTIFIED ELECTRICIAN