

DESCENDIT 15 (ON/OFF, DALI)




The PRECILUM RECESSED WALL range brings the DESCENDIT 15 to the outdoor world of Wall-Mounted lighting. Bringing the flexibility to outdoor application, this lighting fixture is ideally suited to use in the building and ceiling illumination.



PRODUCT SPECIFICATIONS

- INPUT VOLTAGE: 230V AC/50 Hz
- EFFICIENCY: > 92%
- POWER CONSUMPTION: 18W (up to 2175 lm)
- LIFETIME: > 100 000 hours
- THERMAL PROTECTION: yes
- LED DEVICE: OSRAM
- LED VARIANTS: 3000K, 4000K, 5000K and other according requirement
- WEIGHT: 2,54 kg
- OPERATING TEMPERATURE: range -20 °C to +40°C
- ENVIRONMENT: four OUTDOOR use, IP65
- HOUSING COLOR: RAL 7015 and other RAL according requirement
- MATERIALS: housing-die-cast Aluminium, cover-tempered glass, Stainless Steel ring
- CONTROL: ON / OFF or DALI


DIMENSIONAL DRAWINGS

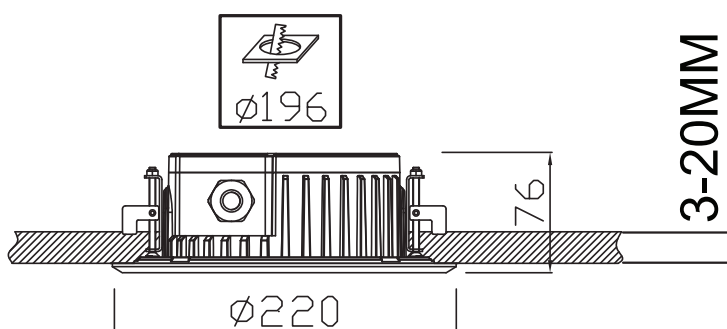

DESCENDIT 15 (ON/OFF, DALI)

PHOTOMETRICS

- Variants: 8°, 15°, 30°, 60°

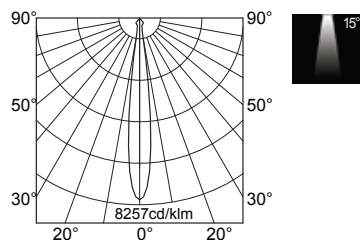

ACCESSORIES

- See WEB site

CONNECTION

- SERIAL CONNECTION MUST BE DONE BY CERTIFIED ELECTRICIAN