DESCENDIT 24



PAGE 1/2

DESCENDIT 24 (ON/OFF, DALI)



The PRECILUM RECESSED WALL range brings the DESCENDIT 24 to the outdoor world of Wall-Mounted lighting.
Bringing the flexibility to outdoor aplication, this lighting fixture is ideally suited to use in the building and ceiling ilumination.










PRODUCT SPECIFICATIONS

- INPUT VOLTAGE: 230V AC/50 Hz
- EFFICIENCY: > 92%
- POWER CONSUMPTION: 29W (up to 2980 lm)
- LIFETIME: > 100 000 hoursTHERMAL PROTECTION: yes
- LED DEVICE: OSRAM
- LED VARIANTS: 3000K, 4000K, 5000K and other according requirement
- WEIGHT: 3,3 kg
- OPERATING TEMPERATURE: range -20 °C to +40°C
- ENVIRONMENT: four OUTDOOR use, IP65
- HOUSING COLOR: RAL 7015 and other RAL according requirement
- MATERIALS: housing-die-cast Aluminium, cover-tempered glass, Stainless Steel ring
- CONTROL: ON / OFF or DALI

DIMENSIONAL DRAWINGS

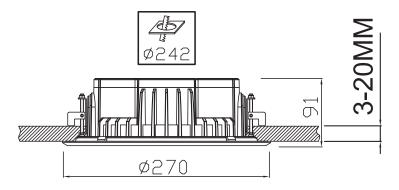

DESCENDIT 24




PAGE 2/2

DESCENDIT 24 (ON/OFF, DALI)

PHOTOMETRICS

Variants: 5°, 8°, 15°, 30°, 60°



ACCESSORIES

See WEB site

CONNECTION

SERIAL CONNECTION MUST BE DONE BY CERTIFIED ELECTRICIAN