

BOLLARD CUBE 25737 (ON/OFF)




A timeless bollard offering comfortable visual guidance. Comfortable white light with no glare. Ground/floor installation. Whether our range is used to illuminate public spaces, residential gardens, paths or driveways - you will find the correct light distribution for every requirement.



PRODUCT SPECIFICATIONS

- INPUT VOLTAGE: 230V 50 Hz
- EFFICIENCY: > 87%
- POWER CONSUMPTION: 1 × COB ... 15W (up to 653 lm)
- LIFETIME: > 70 000 hours
- THERMAL PROTECTION: yes
- LED DEVICE: CITIZEN or OSRAM COB
- LED VARIANTS: 3000K, 4000K, 5000K and other according requirement
- WEIGHT: 4,90 kg
- OPERATING TEMPERATURE: range -20 °C to +40°C
- ENVIRONMENT: for OUTDOOR use, IP54
- HOUSING COLOR: RAL 7015 and other RAL according requirement
- MATERIALS: housing-die-cast Aluminium
- CONTROL: ON / OFF

DIMENSIONAL DRAWINGS

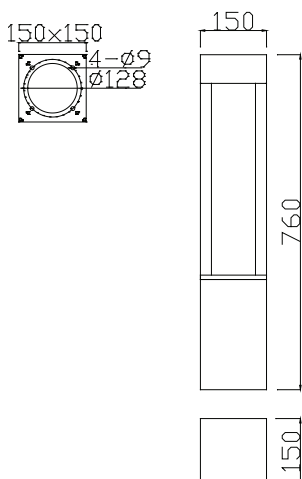


INSTALLATION PICTURE



BOLLARD CUBE 25737 (ON/OFF)

PHOTOMETRICS

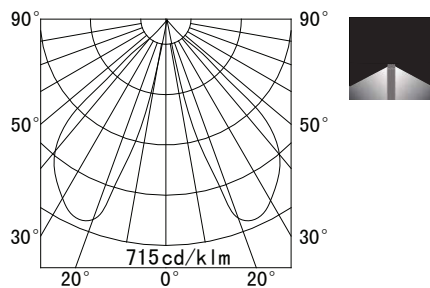

ACCESSORIES

- See WEB site

CONNECTION

- SERIAL CONNECTION MUST BE DONE BY CERTIFIED ELECTRICIAN