

BOLLARD ROUND 25808 (ON/OFF, DALI)




The PRECILUM GARDEN range brings the bollard BOLLARD ROUND to the outdoor world of garden lighting. Bringing the flexibility to outdoor application, this lighting fixture is ideally suited to use in the gardens and parks.



PRODUCT SPECIFICATIONS

- INPUT VOLTAGE: 230V 50Hz
- POWER CONSUMPTION:
 - 9 × 1W...11W (up to 480 lm)
 - 9 × 2W...20W (up to 1079 lm)
- LIFETIME: > 70 000 hours
- LED DEVICE: CITIZEN or BRIDGELUX COB
- LED VARIANTS: 3000K, 4000K, 5000K and other according requirement
- LENGHT: 600 mm, 760 mm, 1500 mm
- WEIGHT: 6,52 kg, 7 kg, 14 kg
- OPERATING TEMPERATURE: range -20°C to +40°C
- ENVIRONMENT: for OUTDOOR use, IP54
- HOUSING COLOR: 7015 and other RAL according requirement
- MATERIALS: housing-die-cast Aluminium, PC cover
- CONTROL : ON/OFF or DALI

DIMENSIONAL DRAWINGS

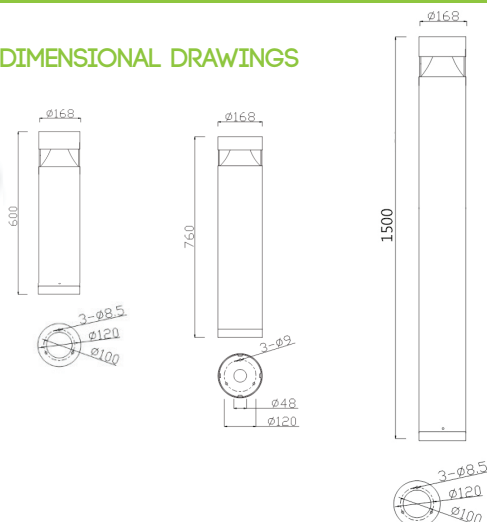


INSTALATION PICTURE



BOLLARD ROUND 25808 (ON/OFF, DALI)

PHOTOMETRICS

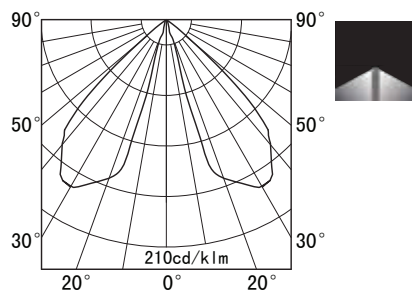

ACCESSORIES

- See WEB site

CONNECTION

- ELECTRICAL CONNECTION MUST BE DONE BY CERTIFIED ELECTRICIAN