

TWIN WALL 2×18 RGB DALI (DALI, DT8)



The PRECILUM - TWIN WALL RGB range brings the TWIN WALL 2×18 RGB DALI DT8 to the outdoor world of Wall-Mounted lighting. Bringing the flexibility to outdoor application. Illumination is possible only UP or common option is UP/DOWN. IP65 ensures safe operation in even the most demanding areas.

The TWIN WALL 2×18 RGB DALI DT8 represents a combination of a balanced design and technology from a Czech manufacturer. The use of quality materials and precision manufacturing offers a professional lighting solution. OSRAM LED's with a life expectancy of 100,000 hrs give a choice of fantastic WHITE illumination. The attractive and compact design provides a truly versatile lighting system. It is ideally suited to use in facade illumination.



DALI-DT8


LUNATONE



PRODUCT SPECIFICATIONS

- INPUT VOLTAGE: 48V DC
- EFFICIENCY: > 91 %
- POWER CONSUMPTION: max. 39 W
- LIFETIME: L70 / 100 000 hours
- THERMAL PROTECTION: yes
- LED DEVICE: OSRAM High power LEDs
- LED VARIANTS: RGB
- WEIGHT: 4,1 kg
- DIMENSION: see 2D drawing
- OPERATING TEMPERATURE: range -20°C to +40°C
- ENVIRONMENT: for outdoor IP65
- HOUSING COLOR: RAL7015, RAL9010 or according requirement
- MATERIALS: die cast Aluminium, cover-tempered glass
- CONTROL : DALI DT8 , DMX512


DIMENSIONAL DRAWINGS

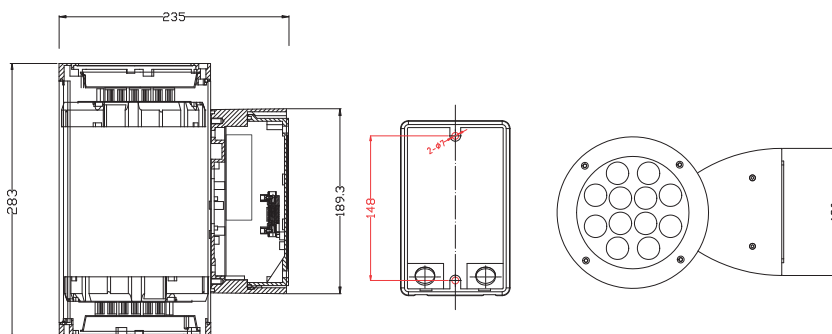

TWIN WALL 2×18 RGB DALI (DALI, DT8)

PHOTOMETRICS

■ Variants: SPOT, NARROW, MEDIUM, WIDE, FLOOD, OVAL, ASSYMETRICS

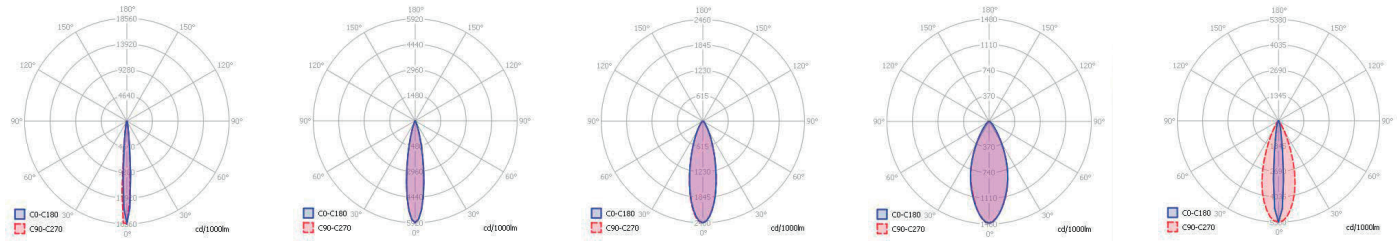

ACCESSORIES

TO BE DEFINED

CONNECTION

48V DC