

INGROUND MICRO RGBW




The INGROUND series was designed using modern simulation methods in order to obtain the highest product quality.



PRODUCT SPECIFICATIONS

Working temperature range	-20°C ÷ +55°C
Power consumption	2W
Power supply	4x150mA
IP protection class	IP67
Lifetime L80B10	≥ 60 000h
Impact resistance	IK10
Protection class	III
Connection	0.5m
Wiring	FLRY-B 8X0.5
Dimming	ON-OFF/PWM
Luminous flux tolerance	±10%
Angle of distribution	38°, 56°, 100°


DIMENSIONAL DRAWINGS

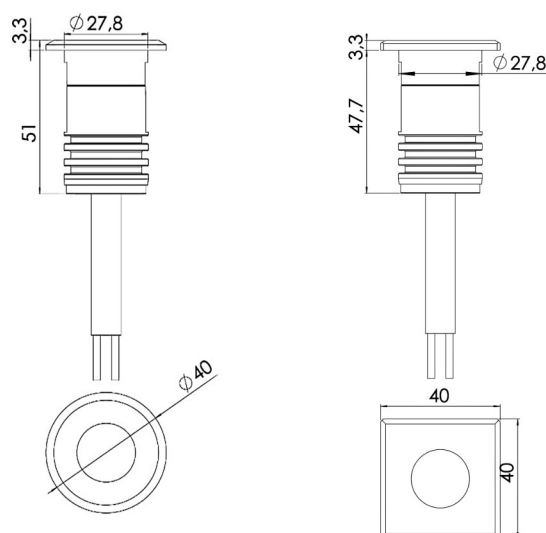

INGROUND MICRO RGBW

CONNECTION

Connecting to the power supply should be done when the power supply is off .

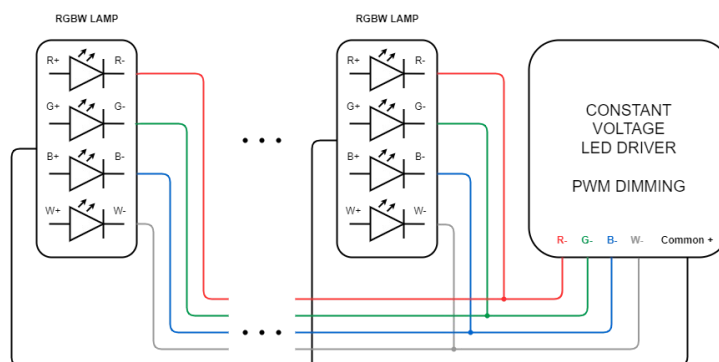

ACCESSORIES

- INGROUND MICRO ABS2 mounting accessory

