



INGROUND MEDIUM RGBW



The INGROUND series was designed using modern simulation methods in order to obtain the highest product quality.












| | | | C | | | | | | |
|--|--|--|---|--|--|--|--|--|--|
| | | | | | | | | | |
| | | | | | | | | | |

| Working temperature range | -20°C ÷ +55°C |
|---------------------------|---------------|
| Power consumption | 24W |
| IP protection class | IP67 |
| Lifetime L80B10 | ≥ 65 000h |
| Impact resistance | IK10 |
| Protection class | III |
| Connection | 0.5m |
| Wiring | JZ-600 5G1 |
| Dimming | ON-OFF/PWM |
| Luminous flux tolerance | ±10% |
| Angle of distribution | 15°, 30° |

DIMENSIONAL DRAWINGS

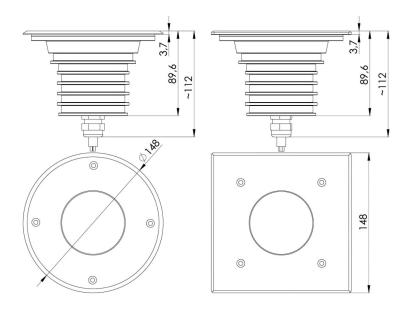






INGROUND MEDIUM RGBW

CONNECTION

Connecting to the power supply should be done when the power supply is off .

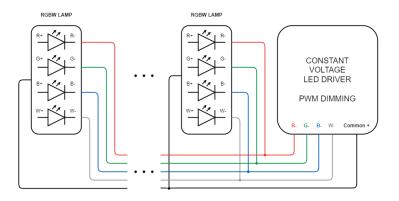

ACCESSORIES

■ INGROUND MEDIUM ABS1 mounting accessory

