

## AQUA MICRO




The AQUA series was designed using modern simulation methods in order to obtain the highest product quality.



### PRODUCT SPECIFICATIONS

Working temperature range	-20°C ÷ +55°C
Power consumption	2W
IP protection class	IP68
Lifetime L80B10	≥ 60 000h
Impact resistance	IK10
Protection class	III
Connection	1.5m
Wiring	SIHF 2X1.5
Dimming	ON-OFF
Luminous flux tolerance	±10%
Angle of distribution	17°, 31°, 39°


### DIMENSIONAL DRAWINGS

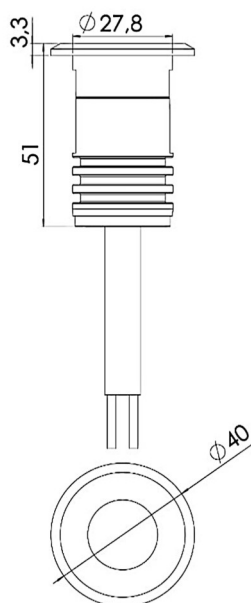

## AQUA MICRO

### CONNECTION

Connecting to the power supply should be done when the power supply is off .

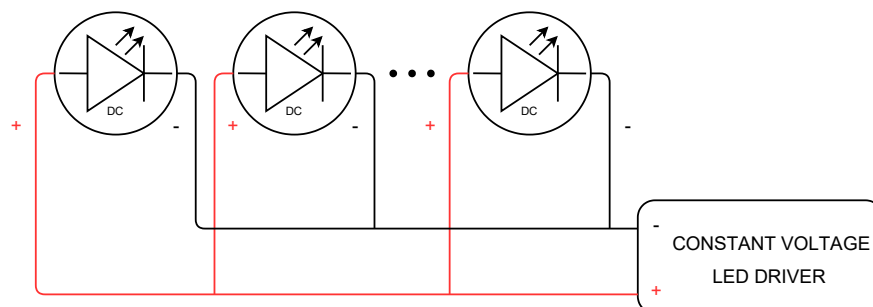

### ACCESSORIES

- AQUA MICRO ABS2 mounting accessory

