


TRILOBIT ECO 290, 570, 850, 1130 WHITE (ON/OFF or DALI)

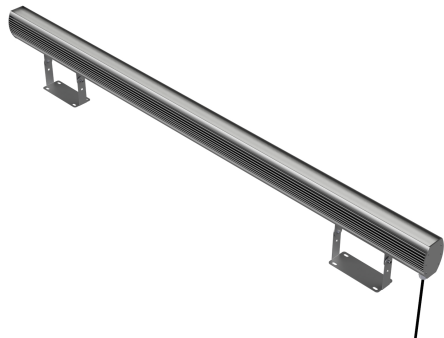

TRILOBIT ECO WHITE - LED surface-mount light line for static or dynamic surface illumination, for indoor and mainly for outdoor use. The linear fixture Trilobit White utilises the latest TRIDONIC LED technology. The refined thermal management system incorporates a sleek and robust heatsink directly into the fixture to ensure maximum heat transfer and long LED life. This linear module bringing the flexibility to outdoor application. It is ideally suited to use in facade illumination, and IP66 ensures safe operation in even the most demanding areas. Available lengths 290, 570, 850, 1130 mm as standard.

TRIDONIC

DALI




PRODUCT SPECIFICATIONS


- INPUT VOLTAGE: 230 V
- EFFICIENCY: > 92%
- POWER CONSUMPTION:

L = 290 mm max. 8 W (900 lm)	L = 850 mm max. 23 W (2500 lm)
L = 570 mm max. 15 W (1550 lm)	L = 1130 mm max. 31 W (3250 lm)
- LIFETIME: > 120 000 hours
- DRIVER TYPE: TRIDONIC LC FLEX RANGE
- LED DEVICE: TRIDONIC PCB BOARD
- LED VARIANTS: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K
- WEIGHT: 0,8 kg, 1,9 kg, 3,0 kg, 3,9 kg
- OPERATING TEMPERATURE: range -20 °C to +40°C
- ENVIRONMENT: for OUTDOOR use, IP66
- MATERIALS: housing-die-cast Aluminium, cover-tempered glass
- CONTROL: ON/OFF or DALI


DIMENSIONAL DRAWINGS

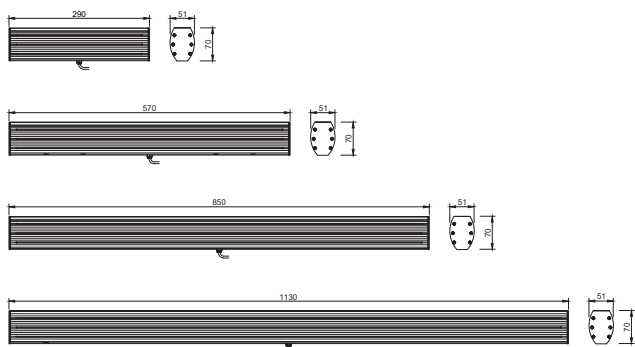

DIMENSIONS OF HANGING HOLDER

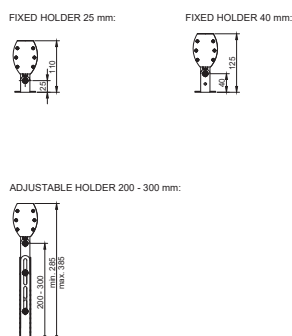


FIXATION METHODES

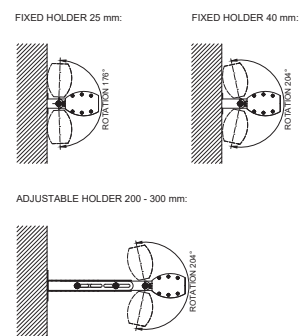

TRILOBIT ECO 290, 570, 850, 1130 WHITE (ON/OFF or DALI)

PHOTOMETRICS

- Variants: 15°, 30°, 45°, 60°, 30°x 90°

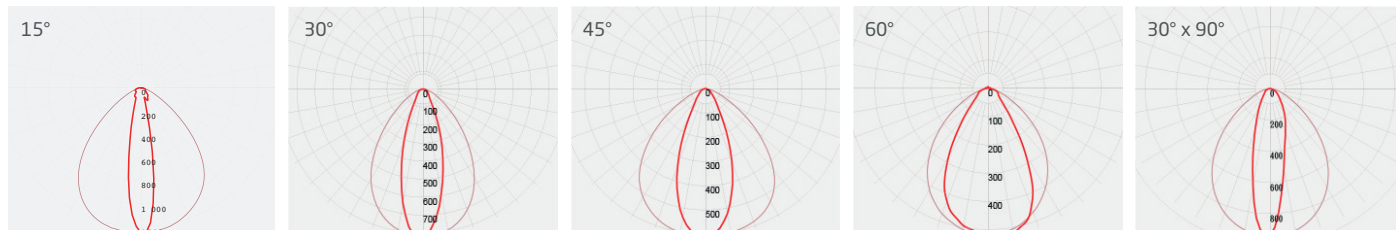

ACCESSORIES


- See WEB site Constant Voltage power supply 230/48V ect.

CONNECTION

- TRILOBIT ECO - IN/OUT CONNECTION

CONNECTION DIAGRAM

ON/OFF OPTION or DALI (CABLE OUTPUT IN/OUT)

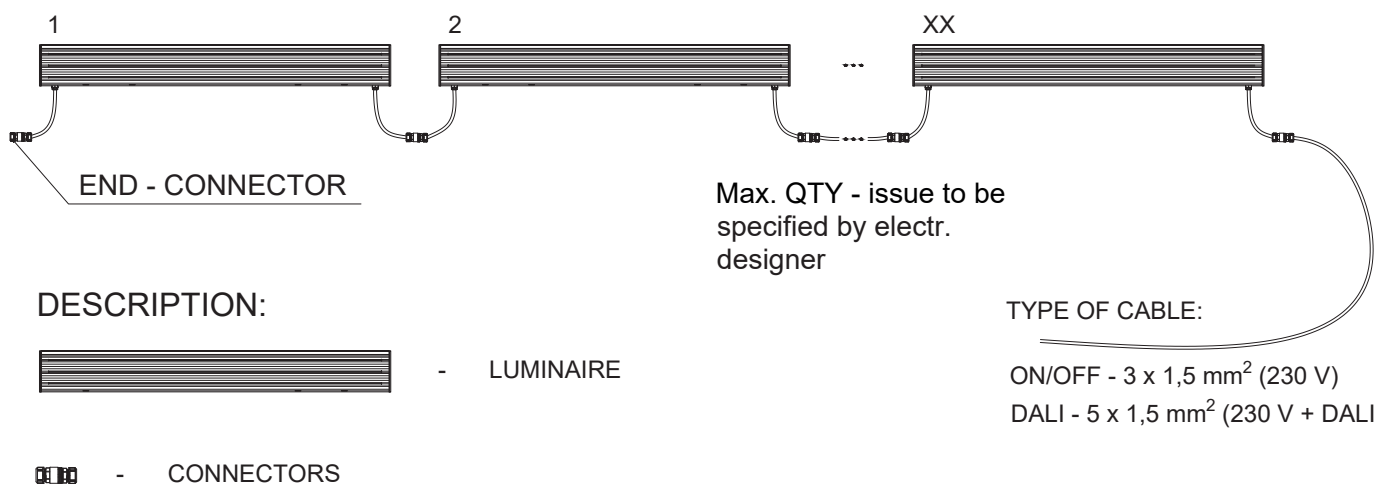

TRILOBIT ECO 290, 570, 850, 1130 WHITE (ON/OFF or DALI)

■ TRILOBIT ECO MIDDLE CONNECTION

CONNECTION DIAGRAMS

ON/OFF OPTION OR DALI (CABLE OUTPUT IN THE MIDDLE)

