SOPHIA QUATTRO
3 RGBW

PRECILUM®
SPECIAL LED LIGHTING SOLUTIONS

SOPHIA QUATTRO 3 RGBW

The SOPHIA QUATTRO 3 RGBW offers a high light output from the latest LED multichip technology, along with a full range of precision optics. With an IP Rating of 66 this product is ideal for outdoor lighting applications offering, solutions to many landscape lighting scenarios.
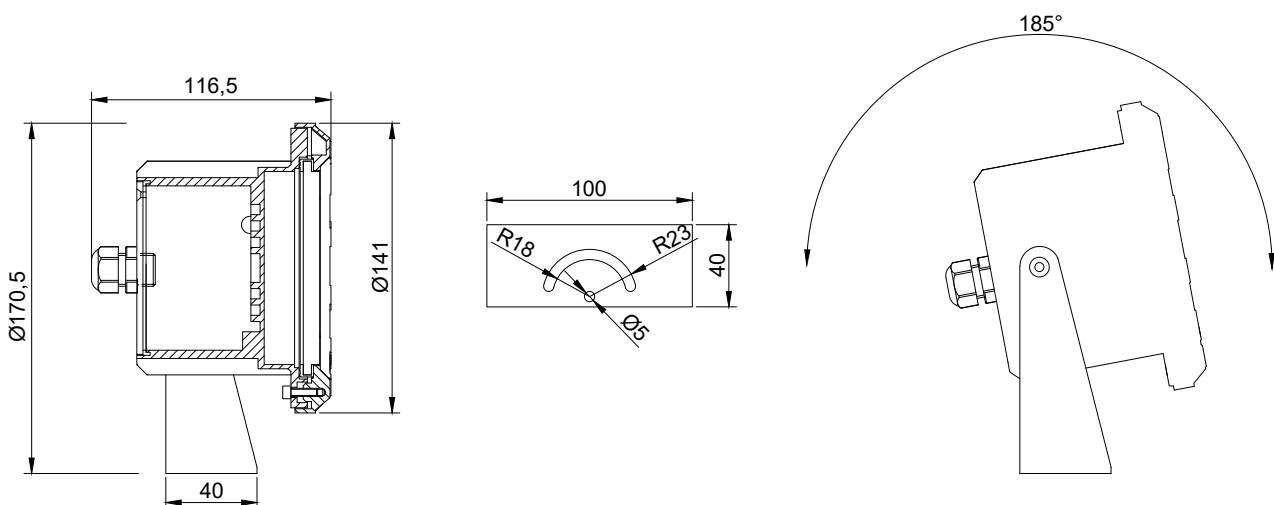Bringing the flexibility to outdoor application, this lighting fixture is ideally suited to use in building illumination, and IP66 ensures safe operation in even the most demanding areas.

DMX RDM   48V   IP66   CE

PRODUCT SPECIFICATIONS

- INPUT VOLTAGE: 48V DC
- EFFICIENTY: > 93 %
- POWER CONSUMPTION: 12W (current 350mA/channel) / 18W (current 500mA/channel)
- LIFETIME: L70 / 100 000 hours
- THERMAL PROTECTION: yes
- LED VARIANTS: RGBW
- WEIGHT: 1,6 kg
- DIMENSION: According dimensional drawing
- OPERATING TEMPERATURE: range -20°C to +40°C
- ENVIRONMENT: for OUTDOOR use IP66
- MATERIALS: Housing - die-cast Aluminium (RAL7015), Cover - tempered glass, Aluminium ring (RAL7015)
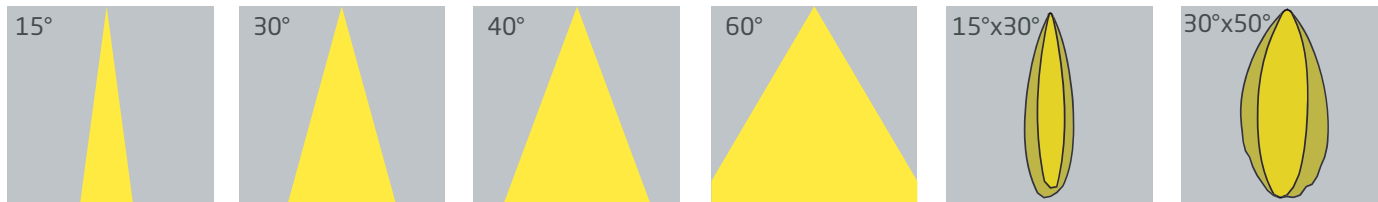- CONTROL: DMX/RDM electronic

DIMENSIONAL DRAWINGS

SOPHIA QUATTRO
3 RGBW

PRECILUM®
SPECIAL LED LIGHTING SOLUTIONS

SOPHIA QUATTRO 3 RGBW

PHOTOMETRICS

- Variants: 15°; 30°; 40°; 60°; 15°x30°; 30°x50°

| 15° | 30° | 40° | 60° | 15°x30° | 30°x50° |

ACCESSORIES

- See website - ACCESSORIES

CONNECTION

JUNCTION BOX