


### PRECILINEAR 1260 RGBW OPAL RECESSED

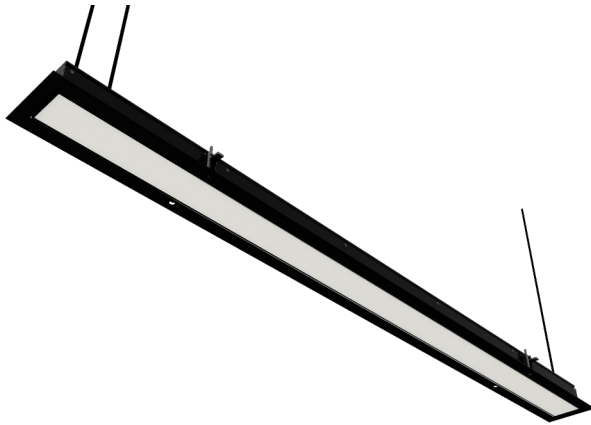

PRECILINER RGBW - LED recessed luminaire for dynamic multicolor illumination. Together with the OPAL diffuser it offers a homogeneous light output.

It has been designed for recessed ceiling constructions for exterior but also interior.


The quality of the components and materials used are the main advantages of this luminaire. High quality RGB+W diodes NICHIA ensure the highest quality light output on the market. This is PRECILINEAR RGBW RECESSED by PRECILUM!



#### PRODUCT SPECIFICATIONS


- INPUT VOLTAGE: 24V DC
- POWER CONSUMPTION: max. 75W
- LIFETIME: L70 / 40 000 hours
- LED DEVICE: NICHIA
- LED VARIANTS: RGBW
- THERMAL PROTECTION: yes
- WEIGHT:
- HOUSING COLOR: RAL COLOURS (According requirement)
- ENVIRONMENT: for outdoor IP55
- MATERIALS: Extruded aluminium, PC cover
- CONTROL: DMX 512 dimming control, RDM protocol for addressing
- OPERATING TEMPERATURE: range -20°C to +40°C
- ENVIRONMENT: for interior application and exterior application

#### DIMENSIONAL DRAWING

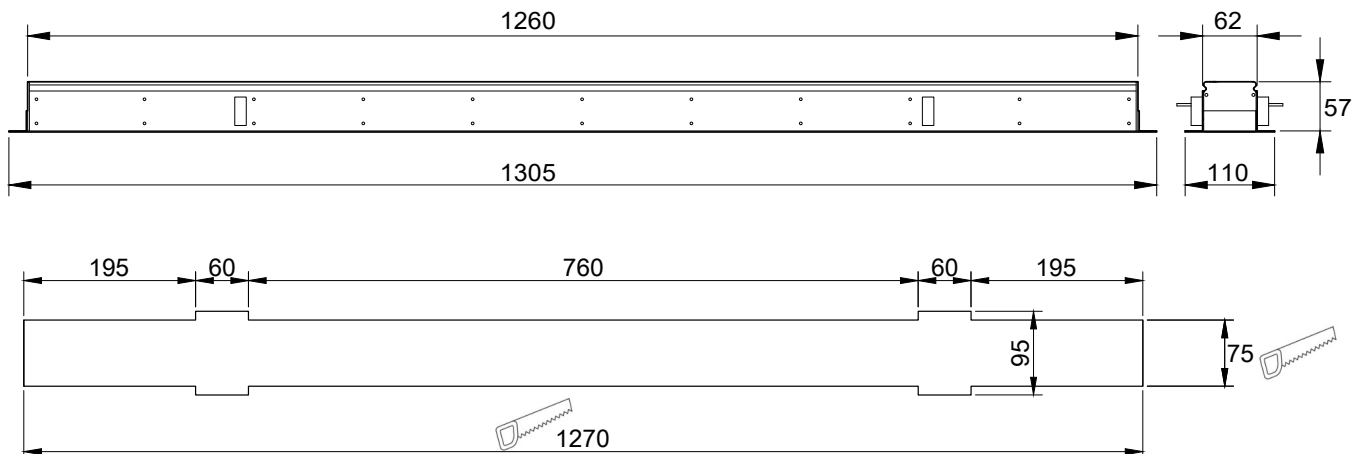


### PRECILINEAR 1260 RGBW OPAL RECESSED

#### FIXATION METHODES

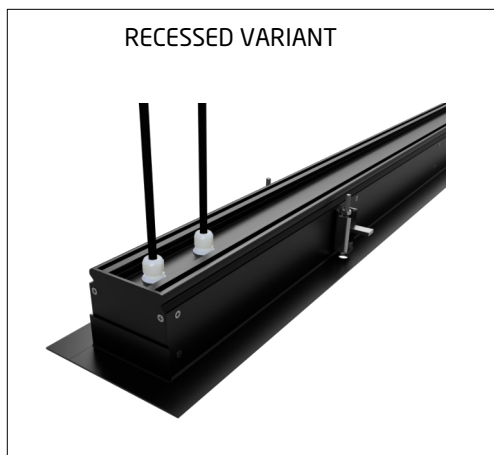

#### PHOTOMETRICS

##### ■ OPAL DIFFUSER



#### ACCESSORIES

- Power supply 230/24V - Meanwell

#### CONNECTION

- Connection TBD by project requirement