


## INGROUND LIMES OPAL RGB



INGROUND LIMES OPAL RGB is a high-performance linear LED inground luminaire engineered for seamless architectural lighting integration. Designed specifically for driveways, pathways, and building facades, this robust dynamic fixture delivers a continuous, uniform line of vibrant color-changing light. Featuring a heavy-duty extruded aluminum housing and a highly durable diffuser, it ensures maximum resistance against mechanical impact and harsh environmental conditions. Operating on a safe 24V DC low-voltage system with DMX512 control compatibility, it offers exceptional energy efficiency.

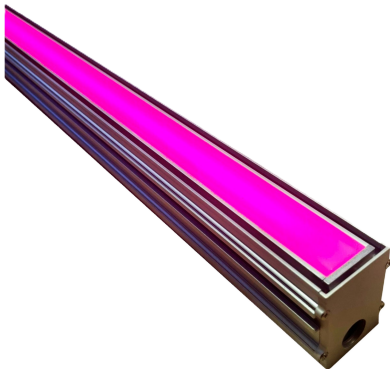


### PRODUCT SPECIFICATIONS

- INPUT VOLTAGE: 24V DC
- POWER CONSUMPTION: max. 24W/m
- LIFETIME: > 60 000 hours
- LUMINOUS FLUX: R - 16 lm/W, G - 37 lm/W, B - 11 lm/W
- LED DEVICE: PREMIUM quality LED strip
- LED VARIANTS: RGB
- LENGTH: 332mm to 1482mm
- OPERATING TEMPERATURE: range -35°C to +50°C
- ENVIRONMENT: for outdoor IP68
- MATERIALS: Extruded aluminium housing, extruded aluminium sleeve, PC diffuser
- CONTROL : DMX DRIVER (INTEGRATED) + POWER SUPPLY 24V DC


### PHOTOMETRICS

- Variants: WIDE



## INGROUND LIMES OPAL RGB

### ASSEMBLY

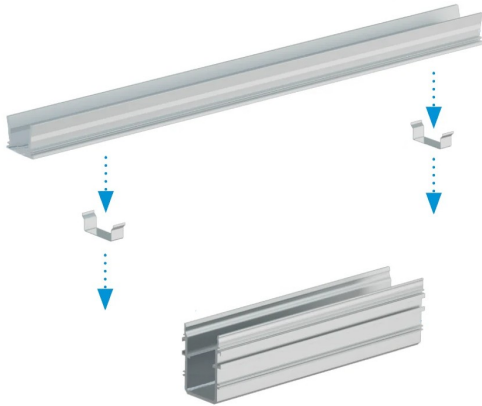


### LENGTH VARIANTS

LENGTH "A" [mm]	LENGTH "B" [mm]	POWER [W]
332	341	7
382	391	8
432	441	10
482	491	11
532	541	12
582	591	13
632	641	14
682	691	16
732	741	17
782	791	18
832	841	19
882	891	20

LENGTH "A" [mm]	LENGTH "B" [mm]	POWER [W]
932	941	22
982	991	23
1032	1041	24
1082	1091	25
1132	1141	26
1182	1191	28
1232	1241	29
1282	1291	30
1332	1341	31
1382	1391	32
1432	1441	34
1482	1491	35

### DIMENSIONAL DRAWINGS

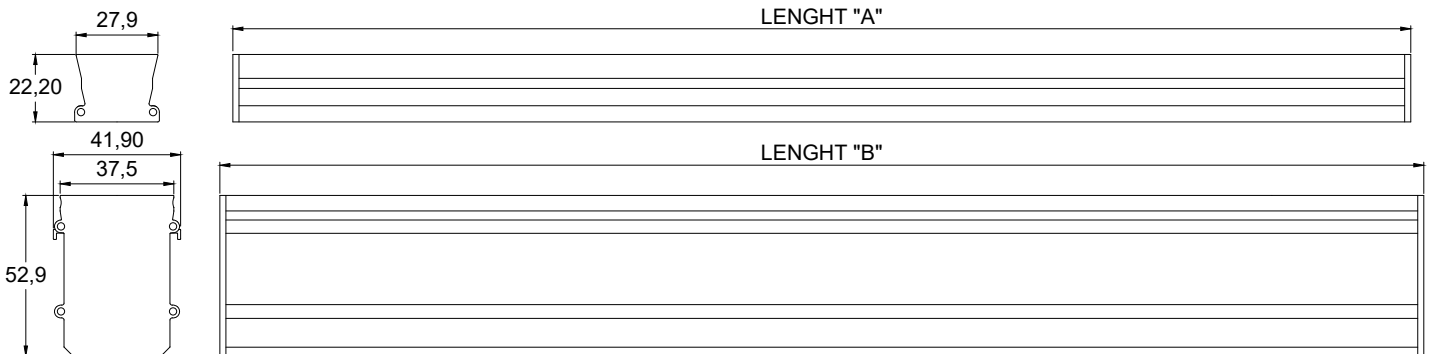

### ACCESSORIES

- See website