

LINEAR MINI MONOCHROMATIC  
ON/OFF, DALI

Ultra-slim linear LED luminaire engineered for seamless architectural integration. > Featuring an exceptionally subtle profile of just 45.5 × 41.3 mm, the LINEAR MINI MONOCHROMATIC delivers high-performance interior and exterior lighting while maintaining a clean, minimalist aesthetic. Equipped with premium Tridonic components and robust IP66 protection.

TRIDONIC


DALI



## PRODUCT SPECIFICATIONS


- INPUT VOLTAGE: 230V 50Hz
- POWER CONSUMPTION:
  - L = 570 mm - max. 16W (2427lm)
  - L = 850 mm - max. 24W (3700lm)
  - L = 1130 mm - max. 32W (4850lm)
- LED VARIANTS: 3000 K, 4000 K, 6500 K
- WEIGHT: 2 kg/m
- THERMAL PROTECTION: yes
- HOUSING COLOR: Natur ALUMINIUM anodization or RAL COLOUR
- ENVIRONMENT: for outdoor IP66
- MATERIALS: Extruded aluminium, PC cover or Tempered glass cover
- CONTROL: ON/OFF, DALI
- OPERATING TEMPERATURE: range -20°C to +40°C
- ENVIRONMENT: for interior application and exterior application

## DIMENSIONAL DRAWING

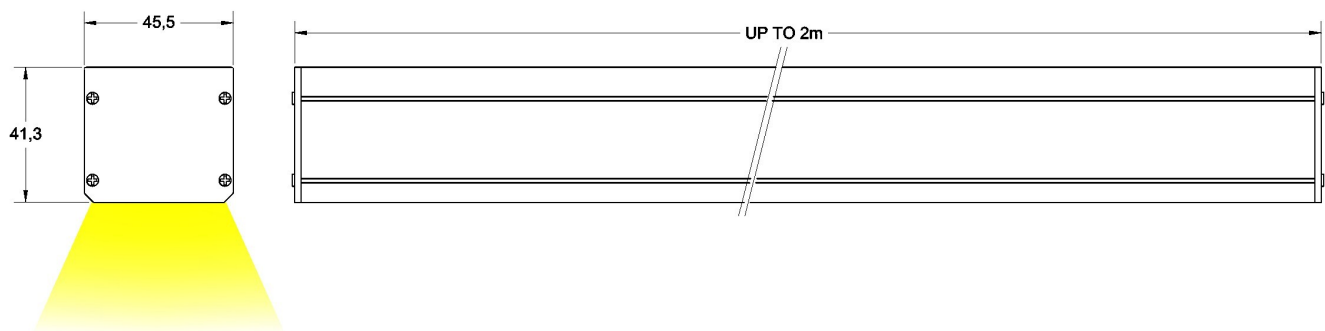

LINEAR MINI MONOCHROMATIC  
ON/OFF, DALI

## PHOTOMETRICS

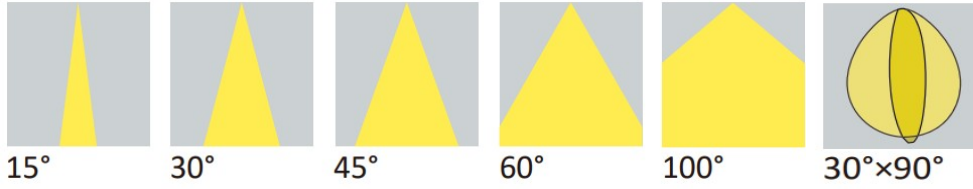

## ACCESSORIES

- To be defined

## CONNECTION

- Connection TBD by project requirement