

LINEAR MINI 24V

MONOCHROMATIC

LINEAR MINI 24V MONOCHROMATIC ON/OFF, DALI




Ultra-slim linear LED luminaire engineered for seamless architectural integration. > Featuring an exceptionally subtle profile of just 45.5 × 41.3 mm, the LINEAR MINI 24V MONOCHROMATIC delivers high-performance interior and exterior lighting while maintaining a clean, minimalist aesthetic. Equipped with premium Tridonic components and robust IP66 protection.



PRODUCT SPECIFICATIONS

- INPUT VOLTAGE: 24V DC
- POWER CONSUMPTION:
 - L = 510 mm - max. 12W (1320lm)
 - L = 760 mm - max. 18W (1980lm)
 - L = 1010 mm - max. 24W (2640lm)
 - L = 1260 mm - max. 30W (3300lm)
- LED VARIANTS: 3000 K, 4000 K, 6500 K
- WEIGHT: 2 kg/m
- HOUSING COLOR: Natur ALUMINIUM anodization or RAL COLOUR
- ENVIRONMENT: for outdoor IP66
- MATERIALS: Extruded aluminium, PC cover or Tempered glass cover
- CONTROL: ON/OFF or DALI by EXTERNAL DRIVER
- OPERATING TEMPERATURE: range -20°C to +40°C
- ENVIRONMENT: for interior application and exterior application

DIMENSIONAL DRAWING

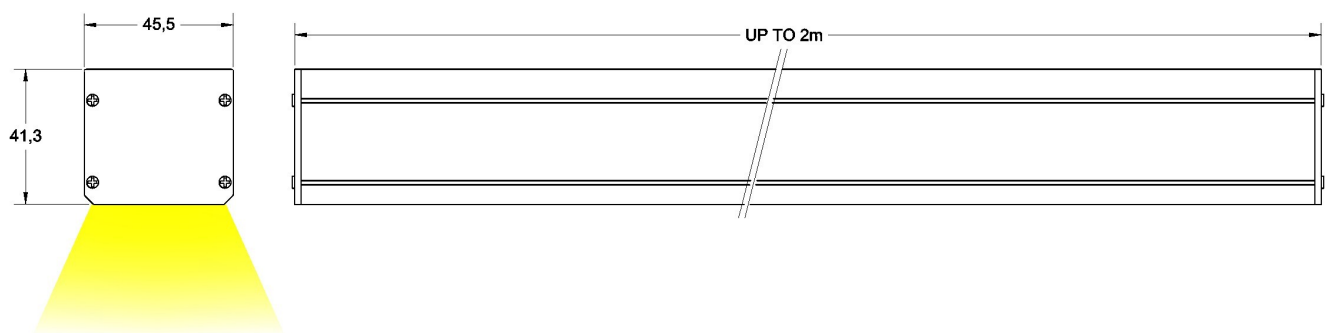


LINEAR MINI 24V

MONOCHROMATIC

LINEAR MINI 24V MONOCHROMATIC
ON/OFF, DALI

PHOTOMETRICS

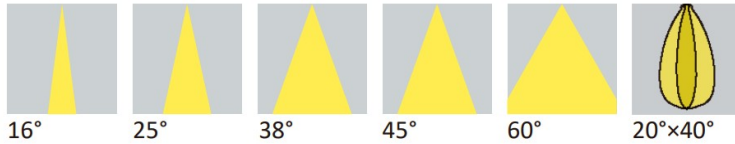

ACCESSORIES

- To be defined

CONNECTION

- Connection TBD by project requirement