

LINEAR MINI RGBW
DMX


Ultra-slim linear RGBW LED luminaire engineered for dynamic architectural lighting. Featuring an exceptionally subtle profile of just 45.5 × 41.3 mm, the LINEAR MINI RGBW delivers vibrant color mixing and high-performance illumination while maintaining a clean, minimalist aesthetic. Powered by 24V DC OSRAM technology and fully compatible with DMX control, it features robust IP66 protection for seamless interior and exterior integration.




PRODUCT SPECIFICATIONS

- INPUT VOLTAGE: 48V DC
- POWER CONSUMPTION:
 - L = 445 mm - max. 12W
 - L = 890 mm - max. 24W
 - L = 1320 mm - max. 36W
- LED VARIANTS: RGBW
- WEIGHT: 2 kg/m
- HOUSING COLOR: Natur ALUMINIUM anodization or RAL COLOUR
- ENVIRONMENT: for outdoor IP66
- MATERIALS: Extruded aluminium, PC cover or Tempered glass cover
- CONTROL: DMX INTEGRATED
- OPERATING TEMPERATURE: range -20°C to +40°C
- ENVIRONMENT: for interior application and exterior application

DIMENSIONAL DRAWING

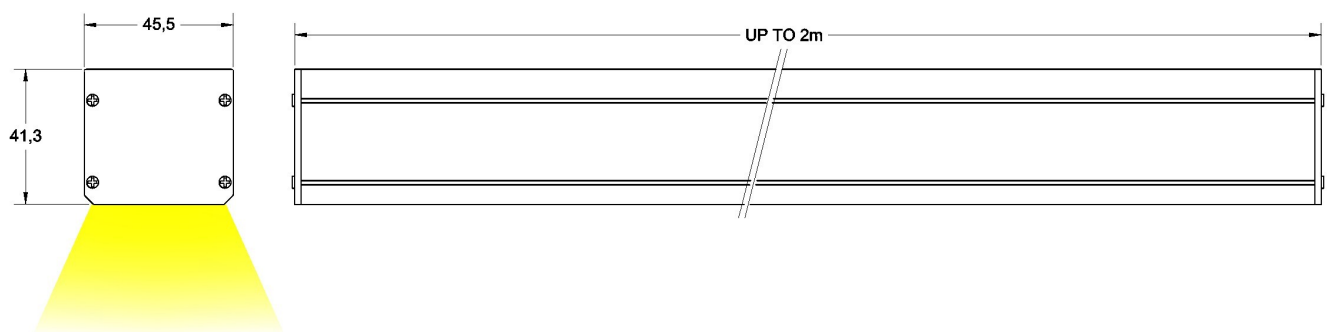

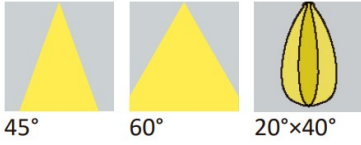**LINEAR MINI RGBW
DMX****PHOTOMETRICS**

45°

60°

20°x40°

ACCESSORIES

- To be defined

CONNECTION

- Connection TBD by project requirement