


PRECIFLEX SE12/20 RGB/RGBW




PRECIFLEX SE12/20 RGB/RGBW is a high-performance, flexible linear LED luminaire engineered for seamless architectural and outdoor lighting applications. Utilizing premium multicolor LED technology, it delivers uniform, dot-free dynamic color mixing alongside crisp white light. This allows for the creation of vibrant atmospheric scenes, captivating lighting effects, and precise architectural accentuation across an endless spectrum of rich colors and custom shades.

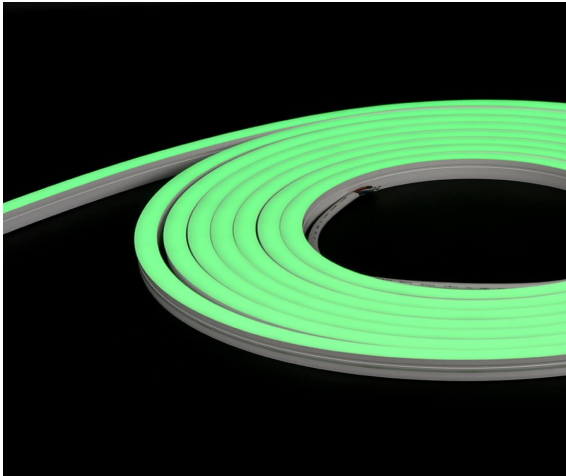

PRODUCT SPECIFICATIONS

- INPUT VOLTAGE: 24V DC
- POWER CONSUMPTION RGB: 10W/m (161lm/m); 15W/m (221lm/m); 20W/m (294lm/m)
- POWER CONSUMPTION RGBW: 10W/m (221lm/m); 15W/m (310lm/m); 20W/m (378lm/m)
- LIFETIME: > 50 000 hours
- LED DEVICE: HIGH QUALITY LEDs
- LED VARIANTS: 2200K, 2700K, 3000K, 3500K, 4000K, 4500K, 5000K, 5700K, 6000K
- MAX. LENGTH RGB: 5m (10W/m); 5m (15W/m), 5m (20W/m)
- MAX. LENGTH RGBW: 6m (10W/m); 5m (15W/m), 5m (20W/m)
- OPERATING TEMPERATURE: range -35°C to +45°C
- ENVIRONMENT: for OUTDOOR use, IP67
- MATERIALS: SILICONE
- CONTROL: ON/OFF, PWM, DALI, 0/1-10V (BY EXTERNAL DRIVER)

DIMENSIONAL DRAWINGS

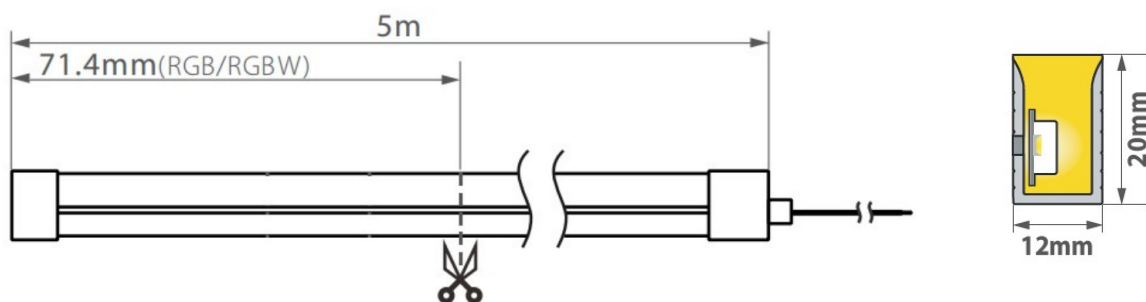


PRECIFLEX SE12/20 RGB/RGBW

PHOTOMETRICS

- Variants:



ACCESSORIES

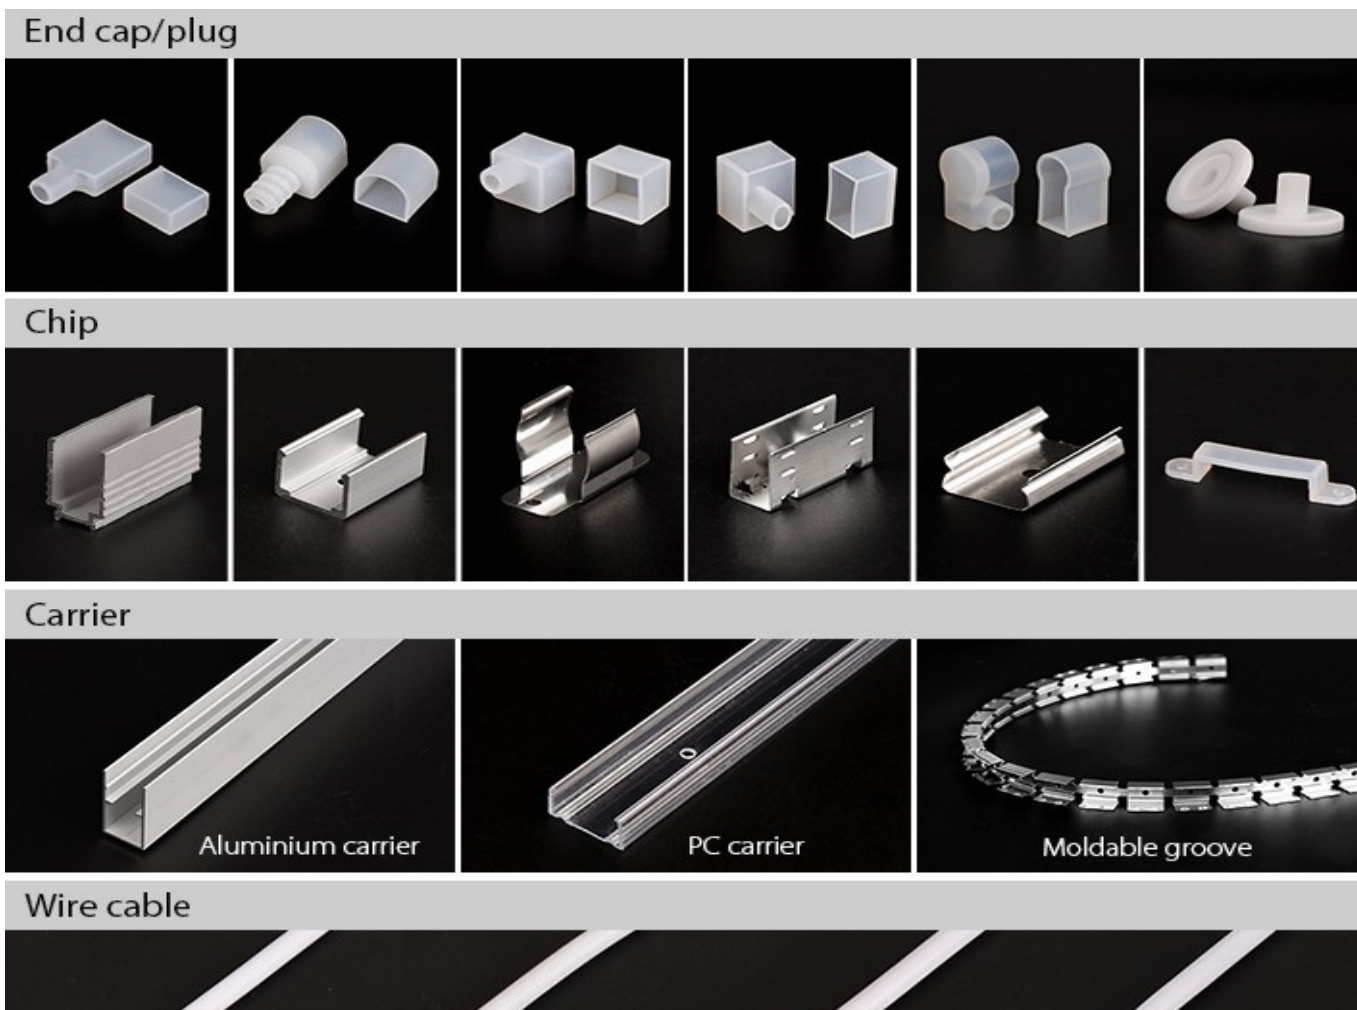

CONNECTION

- See instruction manual